# *4AA eLED® Zoom Light*

**Model Number: UK4AA-AS2ZM**

## Instructions & Important Information

**Thank you for purchasing this UK all environment work and outdoor light! It is tough enough for use in rain, snow, smoke, dust or hazardous locations (see listing). The high intensity adjustable beam eLED lamp delivers constant brightness over most of the battery life. With battery saving mode, battery life is more than doubled.**

**Battery Installation**
To install batteries, hold the case in the position shown. Drop the batteries one by one into the case in the order shown. Make sure that the (+) end of the battery is down for 1 and 2 and up for batteries 3 and 4. Insert the lens, spring and lamp module into the bezel and screw it onto the case.

**ON/OFF**
To operate the UK4AA push in on the black rubber switch to turn the light on and off. For momentary lighting press the switch half-way in.

**HIGH/LOW Power**
**Battery Life Extension**
Battery life can be extended by switching the UK4AA Zoom from high to low power. In order to switch to low power, the light must be ON. By quickly pressing the switch twice, brightness will go from high to low. Repeating the process will switch the light back to high power.

**Changing Beam Angle**
**With Projection Optics**
The beam angle of the UK4AA Zoom can be adjusted by rotating the bezel. When the bezel is screwed all the way down, beam coverage is at maximum. Unscrewing the bezel for up to one full turn will reduce the beam angle from about 21°to 13°or by 40%.

**O-Ring Seal**
Lightly lubricate the O-ring with silicone grease. Do not use tools to remove the O-ring.

**Pressure Equalizing Vent**
Air and gas from battery leakage can pass freely in and out of the UK4AA through a vent in the rear of the light. Do not allow dirt or grease to accumulate on the vent or it will not operate properly.

**Care and Maintenance**
- Keep area around the O-ring clean.
- If the light floods, empty it immediately, rinse with fresh water and dry com pletely before reassembly.
- Replace the reflector/lamp, which contains a hydrogen absorbing catalyst, if it gets wet.
- Do not store batteries in the light for long periods of time; they may leak and damage the light.

**Limited Lifetime Warranty**
Underwater Kinetics products are engineered for maximum performance and durability. All products carry a Limited Lifetime Warranty to the original retail purchaser to be free from defective material and workmanship under normal and intended use. In addition, the Underwater Kinetics Limited Warranty covers materials used in its products to the original purchaser, from the date of purchase, as follows: plastics for 10 years; rubber for 3 years, LED and electronics for 1 year, rechargeable batteries for 90 days.

In the event the original retail purchaser detects a defect in the material or workmanship, the product along with proof of purchase date should be returned to an authorized Underwater Kinetics dealer or directly to Underwater Kinetics with the postage prepaid. Underwater Kinetics agrees to repair or replace at Underwater Kinetics' sole discretion any product found to be defective in material or workmanship within the time period specified above. For the complete Limited Lifetime Warranty write to Underwater Kinetics or go to the web site www.underwaterkinetics.com.

Address all correspondence and returns to:
Underwater Kinetics
13400 Danielson Street
Poway, CA 92064

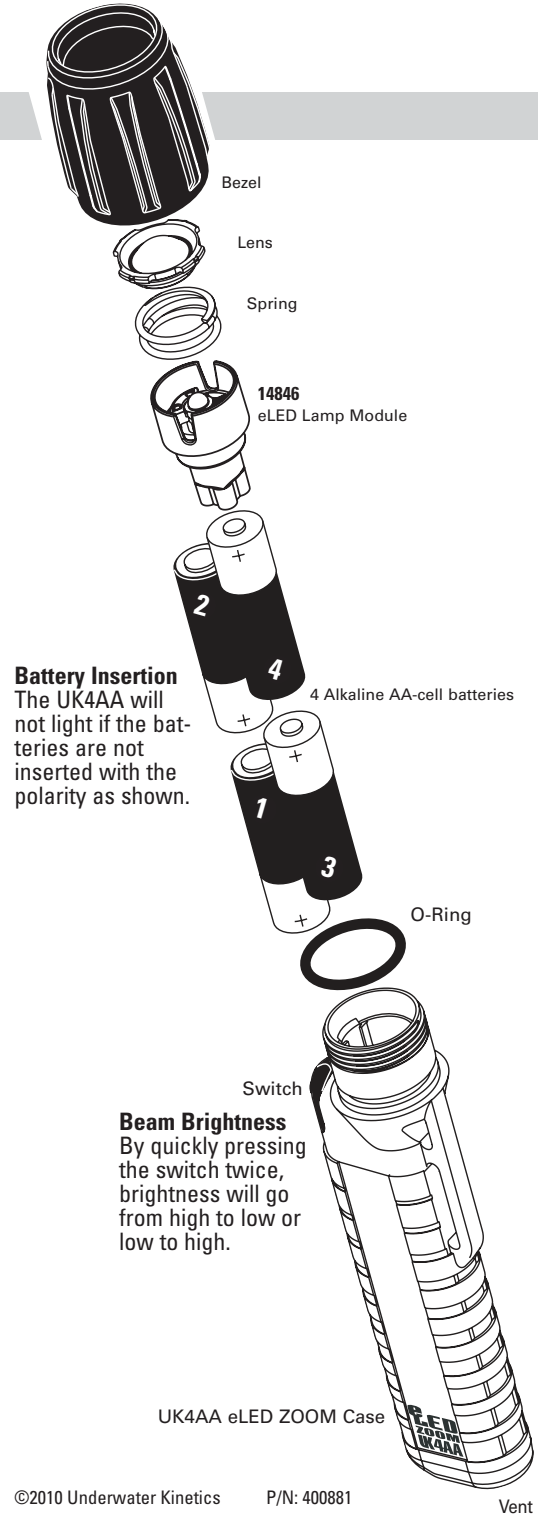


**Battery Insertion**
The UK4AA will not light if the batteries are not inserted with the polarity as shown.

**Beam Brightness**
By quickly pressing the switch twice, brightness will go from high to low or low to high.

**Certifications**
This equipment is suitable for use in Class I, Division 2 Groups A, B, C, D: Class II, Division 2, Group F, G; Class III Division 2, or Non-Hazardous Locations Only. Use only with 14846 Lamp and 4 Duracell MN1500/PC1500, Energizer E91/EN91 or Rayovac AL-AA/815 1.5 V size AA Alkaline batteries.

c UL us LISTED 82EM — CL I, DIV 2, GP A, B, C, D, CL II, DIV 2 GP F, G
CL III, DIV 2 T4

**⚠CAUTION**
Batteries can vent hydrogen gas and possibly cause an explosion if they are (1) installed without the proper polarity, (2) not the same type, brand name and age or (3) completely discharged.
- Load batteries according to the diagram.
- Discard all batteries as soon as they are drained or no longer produce light.
- Do not mix batteries of different type, brand or age.

**⚠WARNING**
**Explosion Hazard**
Substitution of Components May Impair Suitability For Class I, Division 2.

**⚠WARNING**
**Explosion Hazard**
Do Not disconnect Equipment Unless Power Has Been Seitched Off Or The Area Is Known To Be Non-Hazardous

©2010 Underwater Kinetics P/N: 400881